




WL9-RMP

RMP-UPS

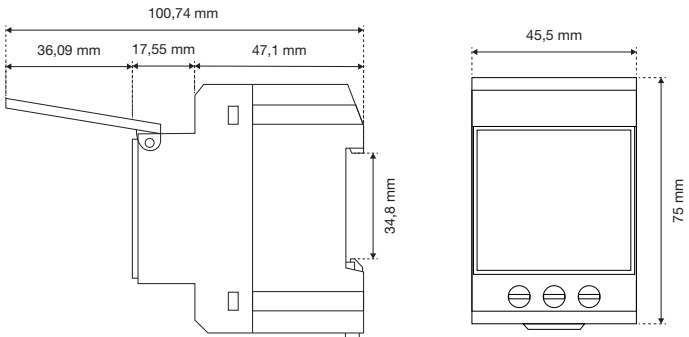

POWER SOCKETS

General Data

Connection	Screw Connection	
Screw Thread	M3,5	
Socket Type	Schuko & Cenelec	
Pole Type	2P+PE	
Tightening Torque	0.5 ... 0.6 Nm	
Stripping Length	8 mm	
Conductor Cross-Section Rigid	0.2 mm² ... 4 mm²	
Cross Section AWG	24 ... 12 (converted acc. to IEC)	
Conductor Cross-Section Flexible (ferrule without plastic sleeve)	0.25 mm² ... 2.5 mm²	
Flexible Conductor Cross-Section (ferrule with plastic sleeve)	0.25 mm² ... 2.5 mm²	
Nominal Current	16A	
Nominal Voltage	250 V AC (50/60 Hz)	
Color	gray (RAL 7035)	
Flammability	V0	
Pollution Grade	EN60747-1	III
Protection Class	EN60529	IP44
Degree Of Impact	EN10045	IK04
Ambiant Temperature	°C	Operating: -25, +70
	%RH	Storage: -30, +70
Ambiant Humidity	Operating: 35, 85	
	Storage: 35, 85	

CODE	SOCKETS	DESCRIPTION	UNIVERSAL PLUG SOCKETS
WL9-RMP		Schuko socket outlet 16A	STANDARD
RMP-UPS		Cenelec socket outlet 16A	STANDARD