
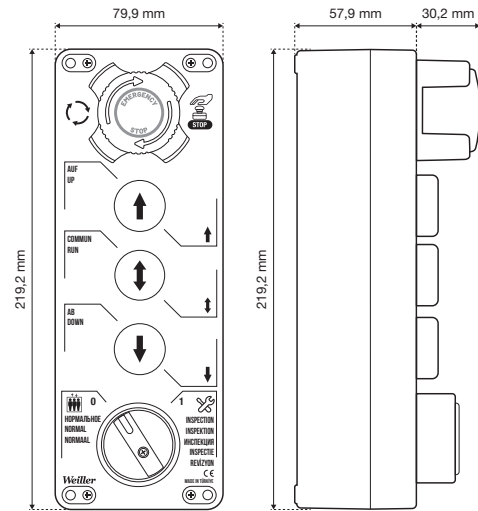


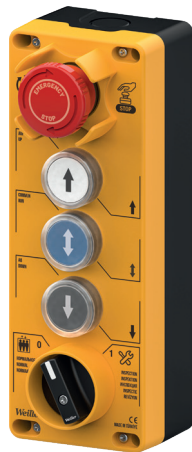

WL22-ELV5PKSC

Material	Thermoplastic (heat & shock resistance)			
Net weight	0,430 kg			
Marking	CE			
Contacts material	Silver Alloy (Ag/Ni)			
Contact operation type	Slow Action			
Contact resistance	≤ 15 mΩ			
Rated Operating Voltage (Ue)	AC-15	690 VAC	DC-14	48VDC
Rated Insulation Voltage	Ui	690V		
Rated Impulse Withstand Voltage	Uimp	4kV		
Rated Thermal Current	Ith	12A		
Rated Enclosed Thermal Current	Ithe	12A		
Conditional Short-Circuit Current	1 Ka			
Frequency	50/60 Hz			
Protection Class	IP 54			
Ambient air temperature for storage	-40.....70 °c			
Ambient air temperature for operation	-30.....70 °c			
Standards	EN 81-50,EN 81-20,IEC 60947-5-1,IEC 60947-1 IEC 60947-5-5, IEC 60947-2-11: 2014,EN 60204-1 EN 60529, EN 60947-3			

OBJECT	DESCRIPTION	SCHEME	CONTACTS
	40mm Emergency Stop Button twist to release with warning		1NC
	UP Button momentary		2NO
	COMMON Button momentary		1NO
	DOWN Button momentary		2NO
	INPECTION Switch maintained,1-2		2NC + 1NO

*Special contact designs are possible according to customer specifications