


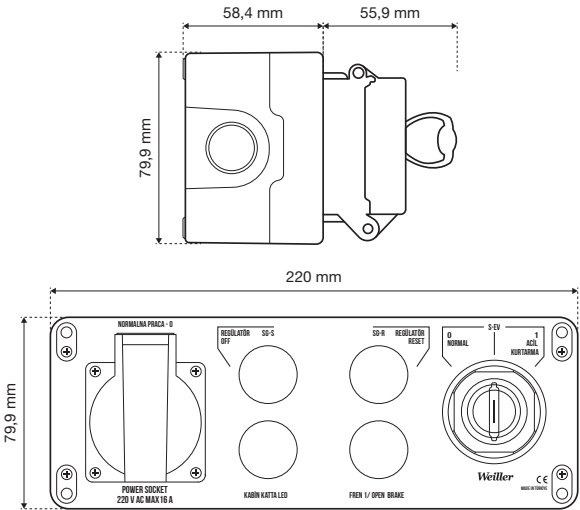

WL22-BYP602

Material	Thermoplastic (heat & shock resistance)			
Net weight	0,480 kg			
Marking	CE			
Contacts material	Silver Alloy (Ag/Ni)			
Contact operation type	Slow Action			
Contact resistance	≤ 15 mΩ			
Rated Operating Voltage (Ue)	AC-15	690 VAC	DC-14	48VDC
Rated Insulation Voltage	Ui	690V		
Rated Impulse Withstand Voltage	Uimp	4kV		
Rated Thermal Current	Ith	12A		
Rated Enclosed Thermal Current	Ithe	12A		
Conditional Short-Circuit Current	1 Ka			
Frequency	50/60 Hz			
Protection Class	IP 54*			
Ambient air temperature for storage	-40.....70 °c			
Ambient air temperature for operation	-30.....70 °c			
Standards	EN 81-50,EN 81-20,IEC 60947-5-1,IEC 60947-1 IEC 60947-5-5, IEC 60947-2-11: 2014,EN 60204-1 EN 60529			

OBJECT	DESCRIPTION	SCHEME	CONTACTS
	SET-RESET Key Release Selector momentry, 1-0-2		1NO+1NO
	REGULATOR RESET Button momentry		1NO
	BRAKE OPEN Button momentry		1NO
	REGULATOR OFF Button momentry		1NO
	RED Pilot Lamp 12-24VDC		
	Power Socket IP54 schuko		

*All boxes have an IP54 protection rating. However, the lowest IP rating among the assembled products determines the IP rating of the final product.

*Special contact designs are possible according to customer specifications