




WL22-BYP709

Material	Thermoplastic (heat & shock resistance)			
Net weight	0,800 kg			
Marking	CE			
Contacts material	Silver Alloy (Ag/Ni)			
Contact operation type	Slow Action			
Contact resistance	≤ 15 mΩ			
Rated Operating Voltage (Ue)	AC-15	690 VAC	DC-14	48VDC
Rated Insulation Voltage	Ui	690V		
Rated Impulse Withstand Voltage	Uimp	4kV		
Rated Thermal Current	Ith	12A		
Rated Enclosed Thermal Current	Ithe	12A		
Conditional Short-Circuit Current	1 Ka			
Frequency	50/60 Hz			
Protection Class	IP 54*			
Ambient air temperature for storage	-40.....70 °c			
Ambient air temperature for operation	-30.....70 °c			
Standards	EN 81-50, EN 81-20, IEC 60947-5-1, IEC 60947-1 IEC 60947-5-5, IEC 60947-2-11: 2014, EN 60204-1 EN 60529, EN 60947-3			

*All boxes have an IP54 protection rating. However, the lowest IP rating among the assembled products determines the IP rating of the final product.

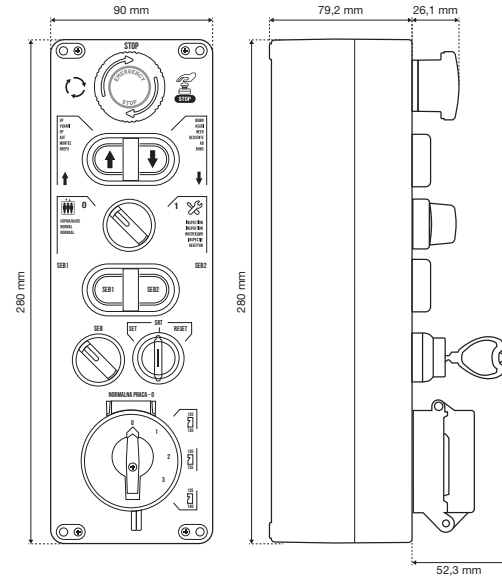

OBJECT	DESCRIPTION	SCHEME	CONTACTS
	40mm Emergency Stop Button twist to release with warning		1NC
	UP/DOWN Twin Button momentary		1NO + 1NO
	INSPECTION Selector Button maintained, 0-1		1NO
	SEB-1 / SEB-2 Twin Button momentary		1NO + 1NO
	INSPECTION Selector Button maintained, 0-1		1NO
	Key Release Selector Button momentary		2NO
	Rotary Switch Maintained		2NC + 3NO

*Special contact designs are possible according to customer specifications